



SIMPLE FIT SENSOR

Providing cost effective presence detection for lighting control.



K5015 Flush Ceiling Mount PIR Sensor

Spring Clips enables ease of installation in plasterboard ceilings




K5016 Surface Ceiling or Wall Mount PIR Sensor

Screw and Plug Fixings, can be mounted direct to the ceiling or on to a square pattress box (K2160 WHI)

- Presence detection by passive infrared
- Passive photocell holds light off in bright ambient conditions
- External programming dials enable quick adjustment of time and lux levels
- Off delay adjustable between 5secs and 40mins following the last observed movement after which the lights switch off
- PIR Lens provides 360 degree detection
- Detection Range of up to 10m diameter at 25°C at 2.5m mounting height
- Mounting Height: Recommended ceiling mount 1.8m to 3m
- Loading up to 6 Amps (1500W) of any type of load (including fluorescent lights)
- Ability to wire more than 1 sensor in parallel to a load

For a quotation please contact our Sales Team
email: sales@mosselectrical.co.uk
or call: 01322 282 700 fax: 01322 282 741
please visit: www.mosselectrical.co.uk

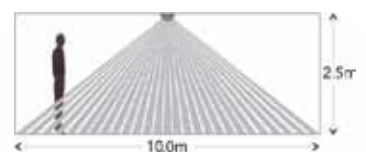

Cone shaped detection pattern.
Optimum mounting height of 2.5m,
gives detection diameter of 10m